

Excel in Your Field™

Specifications

CATEGORY	G3033	G3033H	G3038	G3038H	G3038 2WD
ENGINE					
Type	3-cylinder, indirect-injection, Water-cooled				
Model(Tier 4 Interim)	LS L3BL		LS L3AL		
Engine HP(Gross)	33		38		
PTO HP	27	26	32	31	32
Rated speed, RPM	2,600				
Displacement-cu, in³	116.9		122.2		
Fuel tank capacity(gal)	7.4				
Alternator(V-A)	12V - 50 Amps				
DRIVE TRAIN					
Transmission	Synchro Shuttle	HST	Synchro Shuttle	HST	Synchro Shuttle
No. of Speed	F12 x R12	3 Ranges	F12 x R12	3 Ranges	F12 x R12
Brakes	Wet, Multi - disc				
Steering	Hydrostatic Power Steering				
PTO					
Type	Independent				
Rear(rpm)	Standard (540 rpm)				
Mid PTO(Option)	N/A				
HYDRAULIC SYSTEM					
Control system	Position				
Implement pump, gpm	7.4				
Steering pump, gpm	4.5				
Total flow, gpm	11.9				
Category, 3pt hitch	CAT 1				
Hitch Lift capacity, lbs(Hitch end)	1,808				
Remote valves	Option				
DIMENSION					
Overall length, Bumper to link in.	117.6				
Overall width with tires, in.	42.6				
Wheelbase, in.	65.9		65.4		
Ht to top of rops, in.	90.2		91.2		
TIRE SIZE					
Ag Front / Rear	7 - 14 / 11.2 - 24			6-16, 12.4-24	
IND Front / Rear	25 x8.5 - 14, 43 x16 - 20			N/A	
Turf Front / Rear	25 x8.5 - 14, 41 x14 - 20			N/A	
WEIGHT					
Total weight without ballast, lbs.	2,690	2,710	2,690	2,710	2,610


Note Specifications and design are subject to change without prior notice.

Get More Standard Features

- Power steering
- Switch operated Independent rear PTO
- ROPS with seat belt
- Hydraulic position control
- Differential lock
- Draw bar
- Pre-heat starting aid
- Safety flashers
- Fuel, coolant temperature, tachometer & hour meter gauges
- Pre-heating, parking brake, battery charging, engine oil pressure, fuel filter , PTO operation and high beam operation/warning lights



LS Tractor USA | 6900 Corporation Parkway, Battleboro, NC
P: 252.984.0700 | F: 252.984.0701 | www.lstractorusa.com

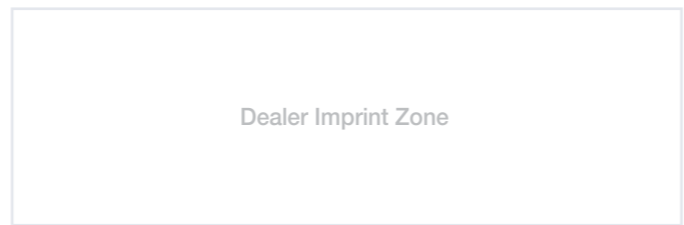

39000931-1311



G Series

G3033 / G3033H / G3038 / G3038H / G3038 2WD

Value Compacts



Excel in Your Field™

- 33HP & 38HP, 3 cylinder fuel efficient engine
- 5 year warranty*
- 12x12 synchro shuttle or 3 range HST with cruise control
- Front wheel mechanical assist 4WD
- Flat operator platform
- Choice of industrial, ag or turf tires at no additional cost
- Available quick attach front end loader with skid steer compatible bucket & grill guard
- Available sub-frame mounted, quick attach 6' backhoe
- Available 72" finishing mower

*5-year limited warranty. See dealer for details

G Series Value Compacts



Synchro Shuttle Transmission Models

Makes changing direction easier than competitive non-shuttle gear models. 12 forward / 12 reverse gear transmission provides more operating speeds than others in its class for superior control, precision and safe operations for virtually any application



Your choice of tires

Choose ag, industrial or turf tires at no additional cost

Optional quick attach front end loader with skid steer compatible bucket

Easy to take off or attach loader and easily change loader attachments. With up to 1,900 lbs of lift capacity it outperforms others in its class. Grill guard comes standard with loader rather than an option like others in its class



2WD Available



LS Tier 4 Interim Engine

3 cyl, low vibration, fuel efficient yet powerful



PTO On/Off Switch

Turn the independent rear PTO on or off with a simple push of a button



Easy open one-piece hood

provides accessibility for easy maintenance



Simple gear range selections

Select your gear range or 2WD/4WD with simple move of the levers



Optional quick attach backhoe

Remove or attach in seconds. With 76" digging depth, 2,817 lbs of digging force and 180° swing arc, it outperforms other in its class



Adjustable Seat

Adjustable seat offers comfortable working condition during long operation