

Excel in Your Field™

Specifications

CATEGORY	XU5055	XU5055C	XU5065PS	XU5065CPS
ENGINE				
Type	4 Cylinder CRDI, Water-cooled, Turbo			
Model(Tier4)	ISM N4LDI-TA			
Engine HP(Gross)	55		65	
PTO HP	46.5		53.4	
Rated speed, RPM	2,600			
Displacement-cu, in³	135.2			
Fuel tank capacity(gal)	15.8			
Alternator(V-A)	12 - 55			
DRIVE TRAIN				
Transmission	Synchro Shuttle		Power Shuttle	
No. of Speed	16F x 16R			
Brakes	Wet, Multi - disc			
Steering	Hydrostatic Power Steering			
PTO				
Type	Independent			
Rear(rpm)	540			
Mid PTO(Option)	N/A			
HYDRAULIC SYSTEM				
Control system	Position / Draft			
Implement pump, gpm	10.5			
Steering pump, gpm	5.3			
Total flow, gpm	15.8			
Category, 3pt hitch	CAT2			
Hitch Lift capacity, lbs(Hitch end)	4,079			
Remote valves	4 (front), 4 (rear)			
DIMENSION				
Overall length, Bumper to link in.	141.5			
Overall width with tires, in.	67			
Wheelbase, in.	80.3			
Ht to top of rops, in.	102.9	100.7	102.9	100.7
TIRE SIZE				
Ag Front / Rear	9.5 - 20 / 16.9 - 24			
IND Front / Rear	10.5 / 80 - 18, 19.5L - 24			
Turf Front / Rear	36 x 13.5 - 15, 16.9 - 24			
WEIGHT				
Total weight without ballast, lbs.	4,674	5,121	4,674	5,121

Note Specifications and design are subject to change without prior notice.

Get More Standard Features

- Dry-type air cleaner
- Pre-heat starting aid
- Hand and foot throttle control
- Instrumentation-alternator
- Warning and engine oil pressure light
- Remote control valves (2 pair)
- Hydrostatic power & tilt steering
- Front loader valve and joystick
- Hydraulic draft and position control
- Automatic lift
- Adjustable seat
- Extendable lower links and telescopic stabilizers
- Drawbar
- Turn signals
- Safety flashers
- Standard 7 pin implement socket

LS Tractor USA

LS Tractor USA | 6900 Corporation Parkway, Battleboro, NC
P: 252.984.0700 | F: 252.984.0701 | www.lstractorusa.com

Front end Loader	LL5103
Tractor Application XU-5000 Series	
Maximum Lift height, in.	116
Clearance with Attachment Dump, in.	82.5
Reach at Maximum Height, in.	15.1
Maximum Dump Angle, deg.	48
Maximum Rollback Angle, deg.	46
Digging Depth, in.	4.3
Overall Height in Carry Position, in.	65.5
Lift Capacity(@ Pivot pin), lbs.	3,060
Breakout Force(@ Pivot pin), lbs.	4,616
Approx. Weight (Loader w/o Bucket), lbs.	1,276

Backhoe	LB3101
Tractor Application XU-5000 Series	
Digging Depth, in.	94.4
Reach from centerline of swing Pivot, in	136.1
Loading Height, in.	80.3
Swing Arc, deg.	180
Transport Height, in.	92.9
Bucket Rotating, deg.	180
Stabilizer Spread(Down position), in.	68.7
Stabilizer Spread(Up position), in.	46.4
Bucket Digging force, lbs.	3,748

Additional Equipment on Cab Models

- Deluxe cabin with Heating and A/C
- Cabin air recirculation
- Front & Rear windshield washer/wiper system
- Deluxe Stereo system with CD Player, USB

Dealer Installed Options

- Auxiliary fuel tank (additional 5.3 gal.)
- Beacon Lamp Kit



Dealer Imprint Zone

39000940 - 1311

LS Tractor

XU5000 Series
XU5055 / XU5055C / XU5065PS / XU5065CPS
Utility Tractors




Excel in Your Field™

- Eco-friendly TIER 4 55HP and 65HP engines
- 5 year warranty*
- 16F x 16R fully synchronized shuttle shift or power shift (XU5065PS models)
- Front wheel mechanical assist 4WD
- Choice of industrial, ag or turf tires at no additional cost
- Available with quick attach skid steer compatible front end loader with grill guard
- Available sub frame mounted, quick attach 8' backhoe

*5-year limited warranty. See dealer for details

XU Series Utility Tractors

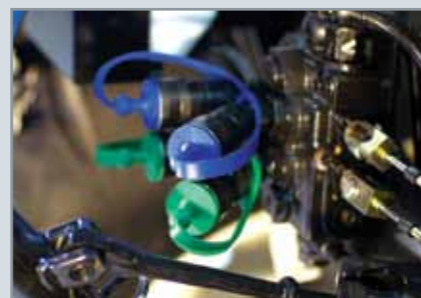

2 sets of remotes and detent function standard

Adds functionality and improves ease of use by allowing attachment of hydraulically controlled implements without the high, additional costs like others in its class to add the remotes as options



Quick attach, self leveling front end loader with skid steer compatible bucket (Optional)

Easy to take off or attach loader and easily change loader attachments. With up to 3,065 lbs of lift capacity it outperforms others in its class. Grill guard comes standard with loader rather than an option like others in its class



Shibaura ISM Tier 4 Engine

Meets EPA's most stringent emission standards while delivering rated horsepower quietly with low vibration



Power Shuttle Models

Maximizes ease of use with effortless, clutchless directional changes with the same 16 forward/16 reverse speeds



Flat platform open station models

With rubber mat and side mounted gear lever, maximizes space, improves operator comfort, and makes getting on/off tractor easier



Full Function Dash Panel

Important functional data is available at glance for optimum performance and control



Rear work light

Never be in the dark with this hands-free functional feature that allows light to be directed where you need it



Your choice of tires

Choose ag, industrial or turf at no additional cost